


Sharp MultiSync® E559

The entry point for professional display solutions, the Sharp MultiSync® E9 Series is designed for modern business environments that need more than a consumer TV can offer.

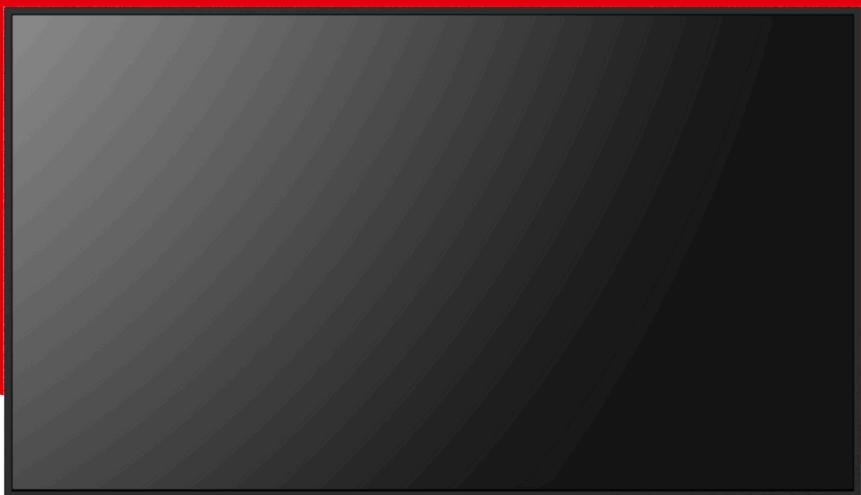

- Unhindered readability – a high-haze panel reduces glare from windows and ambient light, keeping signage content and presentations clear for uninterrupted viewing in any environment.
- Standardised functionality – shares a common identity with the wider Sharp display portfolio, ensuring unified operation and remote device management, and consistent styling for a seamless user experience.
- Effortless plug-and-play signage – the integrated USB MediaPlayer enables native UHD content playback with auto-start functionality, delivering instant digital signage without the need for external hardware or content management systems.
- Flexible orientation – designed for both portrait and landscape installation, with uniform bezel width on all sides to ensure a clean, professional look in any configuration.

Specifications

Panel Data

Bezel Horizontal (mm)	11
Bezel Vertical (mm)	11
Panel Response Time (ms)	8

Installation

Portrait Installation	True
Landscape Installation	True
Landscape	True
Portrait	True
Mounting (VESA mm)	400 x 200 (FDMI)
Mounting (Number of Points/Pitch)	4
Mounting Screw Specification (Size/Max Length)	M6

Key Specifications

Special Characteristics	USB Media Player, NaViSet Administrator 2, CEC Support, Powered USB-Port, HDMI ARC, Scheduler
Built in Speakers (W)	10 + 10
Remote Management	True
Operating Time	16/7
Supported Image Format	Max. resolution 15360 x 8640, JPG (baseline, progressive, RGB, CMYK)

Additional Features

Colour Versions	Black Back Cabinet, Black Front Bezel
Safety and Ergonomics	UKCA, UL/C-UL or CSA, FCC Class B, CE, EnergyStar 8.0, VCCI, RCM
Warranty	3 years warranty incl. backlight

Weights and Measures

Shipping Carton Dimensions (Width) mm	1386
Shipping Carton Dimensions (Height) mm	845
Shipping Carton Dimensions (Depth) mm	130
Shipping Weight (Kg)	17

Touch Interface Specification

Haze Level [%]	Pro 25
----------------	--------

Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 135
Vertical Frequency [Hz]	24 - 75

Connectivity

Digital	HDMI, USB Type C
Analog	D-sub 15 pin
Output Control	LAN 100Mbit

Environmental Conditions

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

Ergonomics

Landscape Dimensions (Width) [mm]	1234
Landscape Dimensions (Height) [mm]	707
Landscape Dimensions (Depth) [mm]	59

Video Terminals

Control Terminals	RS232C, LAN
-------------------	-------------

Audio Terminals

Speaker Output (W RMS)	Internal 10W + 10W
------------------------	--------------------

Accessories

Accessories	Feet, Wall mount, USB-C cable, Trolley
Shipping Content	Cable Clamps, Power Cable, Remote Control, 2 x AAA batteries, Setup Manual, Display

Display Module Data

Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9:00
Brightness (cd/m ²)	350
Contrast Ratio	1200:1
Pixel Pitch (mm)	0.315
Viewing Angle (°)	178
Colour Depth [bn]	1073 (8bit + FRC)
Active Screen Area (H/V) mm	1210 x 680
Max. screen time	up to 16 hours of use per day
Response Time (typ.) [ms]	8

Power Supply and Operating Environment

Operating Voltage (ACV)	100-240
Frequency (Hz)	50-60
Via AC Adapter	True
Operating Voltage (DCV)	100-240
Operating Temperature (°C)	0 - 40
Storage Temperature (°C)	-20 - 60
Storage Humidity Min [%]	10
Storage Humidity Max [%]	80
Power Saving Mode (W)	< 2 (Networked Standby)
Battery	< 0.5 (ECO Standby)

Display

Screen Size (inch)	55
Screen Size (cm)	139

Resolution

Optimum Resolution	3840 x 2160 at 60 Hz
Supported Resolution	1920 x 1200, 1024 x 768, 1280 x 1024, 1920 x 1080, 640 x 480, 1280 x 720, 1280 x 960, 1440 x 900, 1680 x 1050, 1360 x 768, 720 x 576, 720 x 400, 720 x 480, 1400 x 1050, 1280 x 800, 4096 x 2160

Electrical

Power Consumption on Mode [W]	100 (shipping)
Power Supply	100-240 V

Mechanical

Bezel Width (Left/Right) [mm]	11
Bezel Width (Upper) [mm]	11
Bezel Width (Lower) [mm]	11

Green Features

Energy Efficiency

LED backlight technology, Energy consumption: 98 kWh/1000 h, Energy efficiency class: G
Energy Star 8.0

Ecological Standards



Projectors

Weight (kg)

12

Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logotypes are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: Sharp MultiSync® E559, 9/1/2026